# **POWER UNDER PRESSURE**

This coatings guide contains **Titan recommendations for** sprayer, components, tips and pressure settings

## **HYDRA**<sup>™</sup> X

The Hydra X Roofing and **Protective Coatings Sprayers are** built to last and make jobsite life easier and more productive.

#### HydraStroke® Technology

- Unmatched durability and performance powered by electronically driven hydraulics
- Versatility to spray heavy and light bodied coatings without burning out clutches
- Hydraulic motor is optimized with one moving part, reducing heat and extending life

#### **▶** Severe Service<sup>™</sup> Fluid Section

- 5" long, slow stroking piston maximizes power and extends pump life
- Uses a Tri-chrome process to create the industries most durable fluid section that is resistant to corrosion and abrasion caused by aggressive coatings
- Proven Speeflo® technology with over 45 years in the field
- New quick removal fluid section allows one person to replace on the jobsite


#### **▶** Intelligent Design

- Effortless drum changes with the electric AutoLift<sup>™</sup> system that raises and lowers the fluid section with the touch of a button
- One sprayer with modular fluid section allows for two different performances out of each sprayer
- Large 12" pneumatic tires make it easy to move around job site

#### **▶** Extremely Efficient Cooling System

- Primary fan and secondary radiator and fan make this a very cool and trouble-free system
- Large 6 gallon hydraulic reservoir keeps fluid cool

HONDA

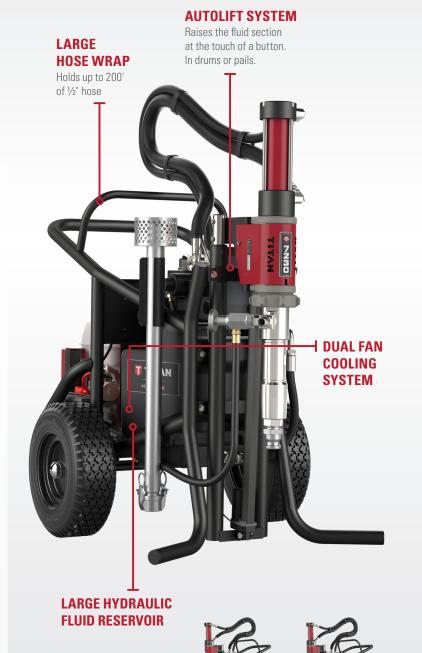

4.00 GPM

4500 psi

0.067"

385 lbs

**HYDRA X 7230** 

3.00 GPM

7250 psi

0.057"

385 lbs

102444932



### WEARGUARD CONVENIENCE PROGRAM **KEEPS YOU UP AND RUNNING**



When you purchase a new Titan sprayer, you're able to take advantage of our exclusive WearGuard Convenience Program. Protect your investment by purchasing a spare fluid section or PermaStroke kit at a discounted rate. Save yourself the time and frustration of an extra trip or waiting for parts to arrive in the event that your sprayer goes down. When you have a backup fluid section or PermaStroke kit on hand, replacement can quickly be made without leaving the jobsite and doesn't require special tools. The bottom line is that WearGuard keeps you up and running.

Not interested in purchasing a spare fluid section? We also offer the option of a free packing kit on select sprayers.

For more information on pricing and how to order, go to:

www.titanwearguard.com or scan the QR code.












All information contained in this brochure is based on the latest information available at the time of printing. Titan reserves the right to make changes at any time, without notice. Due to continuous innovation, specifications may progressively change. Contact one of our dependable sales reps or call our dedicated customer service team for more information.

Titan Tool | 1770 Fernbrook Lane | Minneapolis, MN 55447 | 800-526-5362 Phone | **titantool.com** 





MY TAN

**KEEP TITAN WITH YOU** 


**WHEREVER YOU GO** 

MyTitan™ gives you immediate access to all things Titan. Anywhere, anytime on your computer or mobile device. MyTitan gives you everything you need to get the most out of your sprayers, all in one place, no matter where the workday takes you. MyTitan is designed to make your life easier, your business more efficient, and your day more productive-so you can stay ahead of the game, do more in less time, and never lose track of another detail.

For more information or this new app, go to:

www.titantool.com/ mytitan-welcome or scan the QR code.



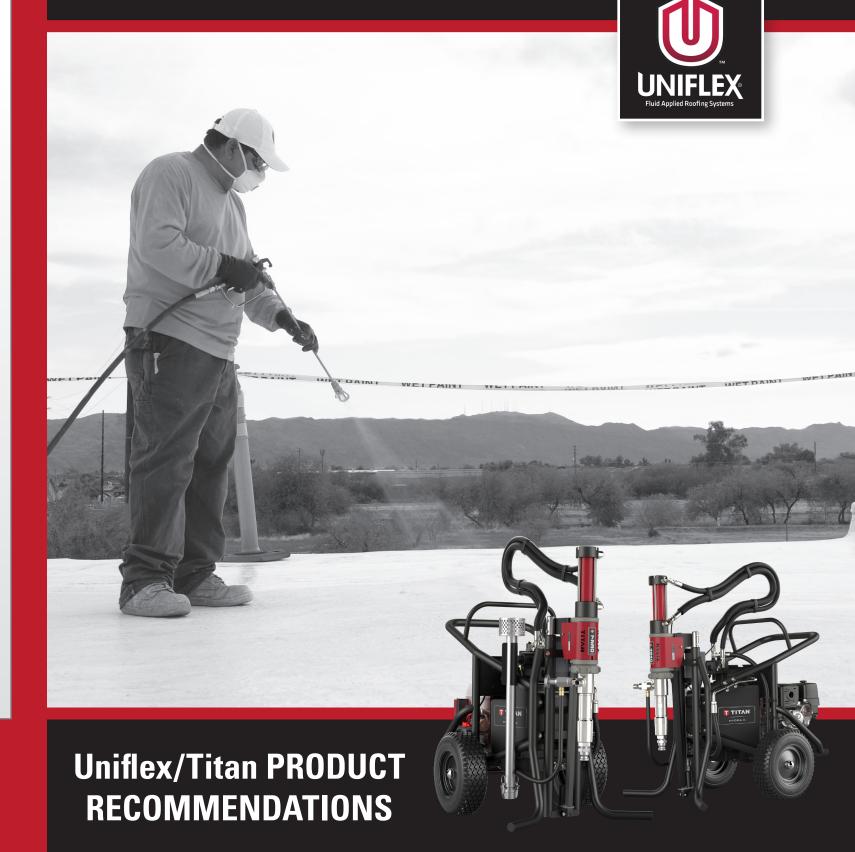

Max Delivery

Max Operating Pressure

Max Tip Size (1-Gun)

PART NUMBER

	COATING				UNIFLEX	UNIFLEX/TITAN PRODUCT RECOMMENDATIONS				Ţ	TYPICAL COMPONENT NEEDS							
UNIFLEX For a Page and Finding Systems	CATEGORY	ТҮРЕ	PRODUCT DESCRIPTION	UNIFLEX PART NO.	SPRAYER	SPRAY TIP SIZES	PRESSURE SETTINGS (at Machine)	MAXIMUM HOSE LENGTH	AIR POWERED EQUIVALENT	SMALLER JOB EQUIVALENT	MULTI-GUN MANIFOLD 7500 psi	SIPHON ACCESSORIES	AIRLESS SPRAY GUNS	3/4" x 7500 psi HOSE	1/2" x 7500 psi HOSE	3/8" x 7500 psi HOSE	7500 psi WHIP HOSE	TIPS
SILICONE 44  WITH A STATE OF THE STATE OF TH		SILICONE	Silicone 44	<b>5 Gallon</b> 6509-63036 <b>55 Gallon</b> 6510-49629	<b>Hydra X 7230</b> 102444932		7200 psi	300ft.	PowrCoat <sup>™</sup> 1072 Cart Mount 100655067  PowrCoat 1064 Cart Mount 100655042	N/A		AutoLift™ Comes standard and works with drum/pail  Tote 102444874  55-gallon Closed Drum 102444882  5-gallon Siphon 102444890	RX-Apex Unfiltered Spray Gun Max. Operating Pressure 5000 psi 101569846  M-8 3/8" Spray Gun Max. Operating Pressure 7700 psi 102445228  M-8 1/4" Spray Gun Max. Operating Pressure 7700 psi 100544113  S-7 3/8" Spray Gun Max. Operating Pressure 7700 psi 001386325  S-7 1/4" Spray Gun Max. Operating Pressure 7700 psi 001386325	<b>50ft.</b> 102445210 Moisture Resistant	<b>50ft</b> . 101816494 Moisture Resistant	<b>50ft.</b> 101816502 Moisture Resistant	3/8" x 6' 100477074 1/4" x 3' 100477025 1/4" x 6' 009018219	Please speak with your Titan Rep to determine what tip sizes are best for your material.  In certain cases tip size is dependent on pressure set at machine
4 100 mm m	WHITE/ PIGMENTED ROOF COATINGS	COOL ROOF	Premium Elastomeric Finish Coat	<b>5 Gallon</b> 992-1156 <b>55 Gallon</b> 992-1164	Hydra X 4540	0.031–0.053"	4000 psi		PowrCoat 1045 Cart Mount 100655026	Hydra M 4000 3/4" Outlet 004335485 With Filter 001611078  PowrTwin™ 12000 Plus DI 001196799	<b>3/4" Outlet x3</b> 102444908			<b>50ft</b> . 102444866	<b>50ft.</b> 100477009 <b>100ft.</b> 100476993	<b>50ft.</b> 100476696 <b>100ft.</b> 100477058		
The second secon		PIGMENTED ROOF	Premium Elastomeric Base Accent	<b>5 Gallon</b> 992-1206 <b>55 Gallon</b> 992-1214	102444841		4000 psi	400ft.										
1	ALUMINUM ROOF COATINGS	ALUMINUM	Premium Aluminum Finish Coat	<b>5 Gallon</b> 992-1032	Hydra X 4540	0.011–0.021"	3000 psi											
The Property of the Property o				<b>55 Gallon</b> 992-1040	102444841	0.055–0.065"	4000 psi											
The second of th	ASPHALT EMULSIONS	ASPHALT	Fibered Asphalt Emulsion	<b>5 Gallon</b> 151-2912 <b>55 Gallon</b> 155-6570	<b>Hydra X</b> <b>4540</b> 102444841	0.055–0.065"	4500 psi											
The state of the s	PRIMERS	PRIMERS	Rust Inhibitive Metal Primer	<b>5 Gallon</b> 992-1107 <b>55 Gallon</b> 155-6562	<b>Hydra X 4540</b> 102444841	0.010–0.045"	3000 psi											
4.522 F	ELASTOMERIC BASECOATS	BASECOATS	Premium Acrylic Elastomeric Gray Basecoat	<b>5 Gallon</b> 992-1222 <b>55 Gallon</b> 992-1230	<b>Hydra X 4540</b> 102444841	0.031–0.045"	4000 psi											

See Titan accessories brochure for full product offering.